

DUSK STREET ELEVATION · GOOCH STREET · ILLUSTRATIVE

VILLA GOOCH

THE LANTERN HOUSE — A CONTEMPORARY LUXURY VILLA

2316 GOOCH STREET · DALLAS, TEXAS 75241

A complete redesign of the 3-story spec house at 2316 Gooch Street. The glass stair tower that defined the original becomes a bronze-framed lantern; around it, a warm limestone base, a thermally-modified wood crown and a floating bronze roof plate. Seven bedroom suites, an elevator, a chef's kitchen with scullery, a 50-foot pool loggia, pool and spa, and a top-floor primary retreat with its own terrace.

EXISTING vs. PROPOSED

	EXISTING (MLS 21372838)	PROPOSED
Conditioned area	3,257 SF	6,395 SF
Bedrooms / baths	7 BR / 4 full + 1 half	7 BR / 7 full + 1 half · every bedroom en suite
Stories	3	3 + 37-ft glass stair lantern
Vertical circulation	Stair	Floating stair, glass bridge, 4-stop elevator
Outdoor living	Covered balcony	Loggia, pool, spa, 4 terraces, green roof
Garage	2-car	2-car, EV charging, storage, mudroom entry

SIGNATURE FEATURES

- 37-ft bronze-framed glass lantern: floating lit-tread stair, glass bridge, cascading chandelier
- 4-stop residential elevator serving every level
- Chef's kitchen: 12-ft waterfall island, 48" range, scullery and walk-in pantry
- 50-ft wall of pocketing lift-slide glass to a covered loggia with outdoor kitchen
- Heated salt pool with sun shelf, raised spillover spa and fire lounge
- Seven bedroom suites, each with its own bath and walk-in closet
- Level 3 primary retreat: fireplace, island dressing room, spa bath, 400 SF terrace
- Family lounge with 198-bottle backlit wine wall; climate-controlled wine room under the stair
- Office behind a wood-fin screen and linear reflecting pool
- All-electric: ±14 kW solar, battery, heat pumps, ERV, EV charging

SHEET INDEX

A0.0	COVER SHEET
A0.1	DESIGN NARRATIVE & MATERIALS
A1.0	ARCHITECTURAL SITE PLAN
A2.1	LEVEL 1 FLOOR PLAN
A2.2	LEVEL 2 FLOOR PLAN
A2.3	LEVEL 3 FLOOR PLAN
A2.4	ROOF PLAN
A3.1	FRONT & REAR ELEVATIONS
A3.2	SIDE ELEVATIONS
A4.1	BUILDING SECTIONS
A5.1	SCHEDULES & AREAS

PROJECT DATA

ADDRESS	2316 Gooch St, Dallas TX 75241
SUBDIVISION	Alameda Heights
LOT (ASSUMED)	60' x 145' = 8,700 SF (0.20 AC)
ZONING	R-7.5(A) assumed — verify
CODE BASIS	IRC 2021 w/ Dallas amendments
CONSTRUCTION	Type V-B, sprinklered (13D)
STORIES / HEIGHT	3 stories · 34'-6" parapet · 37'-0" lantern
FOOTPRINT	2,700 SF + 600 SF loggia
LOT COVERAGE	37.9%
SCHOOL DISTRICT	Dallas ISD

AREA SUMMARY

Level 1 — arrival & living	**2,148 SF**
Level 2 — family & suites	**2,368 SF**
Level 3 — primary retreat	**1,879 SF**
TOTAL CONDITIONED	**6,395 SF**
Garage	552 SF
Covered loggia	600 SF
Balconies & terraces	1,117 SF

KEY ASSUMPTIONS

- Lot size and setbacks are assumed from the listing (0.2 AC). A boundary and topographic survey is required.
- True north is not confirmed; drawings use plan north (street at bottom).
- Building height exceeds the 30'-0" R-7.5(A) limit; confirm the site's actual zoning district or seek relief.
- Expansive black clay is noted in the listing; foundation to follow a geotechnical report.

VILLA GOOCH

THE LANTERN HOUSE

2316 GOOCH STREET
DALLAS, TEXAS 75241
ALAMEDA HEIGHTS · DALLAS COUNTY

OWNER

ARCHITECT OF RECORD

STRUCTURAL ENGINEER

MEP ENGINEER

SCHEMATIC DESIGN

NOT FOR CONSTRUCTION

Developed from listing photos and walkthrough video. Verify survey, zoning, geotechnical report and all dimensions before design development.

REVISIONS

NO.	DATE	DESCRIPTION
0	10.21.2026	SCHEMATIC DESIGN ISSUE

PROJECT NO.
2316-GS

ISSUE DATE
10.21.2026

SCALE
NTS

DRAWING SET
ARCH D · 36" x 24"

SHEET TITLE
COVER SHEET

SHEET
A0.0

DESIGN NARRATIVE

The house on Gooch Street already had one great idea: a tall glass stair tower glowing at night. The redesign keeps that DNA and refines everything around it into a calm, contemporary villa organised around three materials and one sequence of space.

01 THE LANTERN
A 37-foot bronze-framed glass volume holds the floating stair, a glass bridge, the cascading chandelier and a 4-stop elevator beside it. It is the house's front door, its beacon at dusk and the vertical spine connecting every level.

02 STONE BASE · WOOD CROWN
Warm limestone sintered-stone panels wrap Levels 1-2; thermally-modified ash wraps the set-back Level 3; a thin bronze roof plate floats above with LED-lit wood soffits.


03 INDOOR-OUTDOOR LIVING
Forty feet of pocketing lift-slide glass open the great room to a 50 × 12 ft loggia with outdoor kitchen, then pool, spa, lawn and fire lounge.

04 EVERY BEDROOM A SUITE
Seven bedrooms, each with a private bath. Four Level 2 suites open to a planted rear terrace; Level 3 holds the primary retreat with dressing room, spa bath and 400 SF terrace.


05 FUNCTION FIRST
Garage to mudroom to scullery to kitchen; laundry on the bedroom level; kids' study; wine room under the stair; powder room off the gallery, not the foyer; mechanical room with roof access.

06 BUILT FOR DALLAS
Deep overhangs and recessed glass, low-E glazing, all-electric heat pumps, ERV, roof PV, green roof and a post-tensioned slab on drilled piers for expansive clay.

DESIGN MOVES — STREET ELEVATION

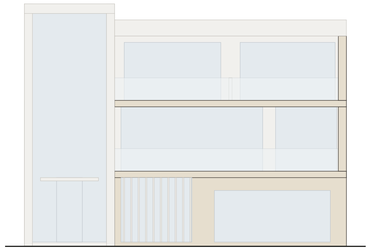


1 STONE BASE
Levels 1-2 in warm limestone panels; recessed glass behind stone cheek walls.

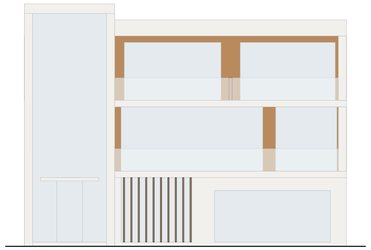

2 WOOD CROWN
Set-back Level 3 and recessed walls in thermally-modified ash; wood fins screen the office.



3 BRONZE LANTERN
Triple-height glass stair hall framed in dark bronze; pivot door under a blade canopy.

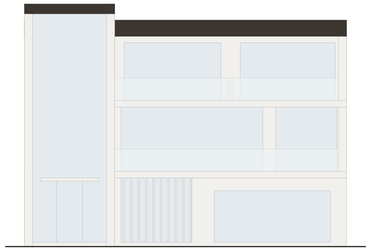


4 FLOATING ROOF
A thin bronze roof plate cantilevers over the terraces; LED coves wash the wood soffits.

WHAT WE KEPT · WHAT WE CHANGED

- KEPT — the glass stair tower, the cascading chandelier, lit stair treads, glass-railed balconies with stained wood soffits, front-facing glass garage door, palm-tree front yard and the 7-bedroom count.
- CHANGED — all-black stucco becomes a warmer stone / wood / bronze palette; the stair tower gains a bronze frame, a pivot door and a canopy; every bedroom gets its own bath; an elevator, pool loggia, pool and spa are added; the primary suite moves to the top floor with a private terrace and spa bath; laundry moves to the bedroom level.

PROGRAM STACKING

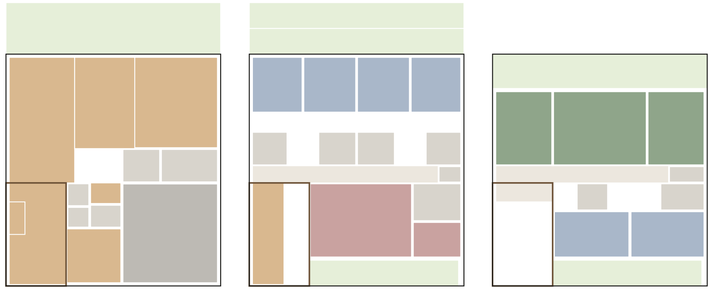

LEVEL 1 · ARRIVAL & LIVING
2,148 SF CONDITIONED

LEVEL 2 · FAMILY & SUITES
2,368 SF CONDITIONED


LEVEL 3 · PRIMARY RETREAT
1,879 SF CONDITIONED

Living & entertaining · Family lounge & study · Bedroom suites · Primary retreat
Service & baths · Circulation · Garage · Terraces & loggia

MATERIAL PALETTE



M1
SINTERED STONE
Warm limestone finish, 5'x10' panels




M2
THERMO-ASH CLADDING
Vertical shiplap, natural oil




M3
DARK BRONZE ALUMINUM
Lantern frame, fascia, window frames



G1
LOW-IRON LOW-E GLASS
Curtain wall, lift-slides, guards



F1
WHITE OAK FLOORING
10" plank, matte natural oil



F2
LIMESTONE PORCELAIN
48" x 48", foyer / kitchen / mud



T1
BOOK-MATCHED SLAB
Fireplaces, baths, kitchen backsplash



P2
VENETIAN PLASTER
Lantern & lounge feature walls



DUSK GARDEN ELEVATION · POOL & LOGGIA · ILLUSTRATIVE

SYSTEMS & SUSTAINABILITY

- STRUCTURE — post-tensioned slab on drilled piers (expansive clay), wood platform framing, steel moment frames at the lantern and long-span glass openings, open-web floor trusses for MEP routing.
- ENVELOPE — ventilated rainscreen; R-23 cavity + R-7.5 continuous mineral wool; R-49 roof with tapered insulation; thermally broken bronze frames with low-E, argon-filled insulated glass.
- HVAC — three-zone variable-speed heat pumps (one per level), ERV for fresh air, dehumidification, MERV-13 filtration.
- POWER — all-electric house: ≈14 kW rooftop PV, 27 kWh battery, Level 2 EV charger, smart panel.
- WATER — heat-pump water heater with recirculation; drip irrigation; downspouts to rain gardens; salt pool with heat-pump heater and automatic safety cover.
- LIFE SAFETY — NFPA 13D residential sprinklers recommended for the 3-story open lantern; hard-wired smoke/CO; every bedroom has a full-height door to a balcony or terrace for rescue openings.
- SMART HOME — lighting control with scene presets, motorized shades in the lantern, integrated AV and security.

PROGRAM BY LEVEL

LEVEL 1 · ARRIVAL & LIVING
Foyer & stair lantern, office, powder & dry bar, living, dining for 10, chef's kitchen, scullery & pantry, mudroom, wine room, 2-car garage, covered loggia with outdoor kitchen.

LEVEL 2 · FAMILY & SUITES
Glass bridge, family lounge & wine bar, kids' study, laundry, linen, Bedrooms 2-5 each with bath and walk-in closet, covered front balcony, rear terrace, green roof.

LEVEL 3 · PRIMARY RETREAT
Primary bedroom with fireplace & morning bar, island dressing room, spa bath, Bedrooms 6-7 with baths, mechanical / storage, front terraces, primary terrace.

GARDEN
Heated pool with sun shelf, raised spa, fire lounge, lawn, outdoor shower, reflecting pool at the entry.

VILLA GOOCH

THE LANTERN HOUSE

2316 GOOCH STREET
DALLAS, TEXAS 75241
ALAMEDA HEIGHTS · DALLAS COUNTY

OWNER

ARCHITECT OF RECORD

STRUCTURAL ENGINEER

MEP ENGINEER

SCHEMATIC DESIGN
NOT FOR CONSTRUCTION
Developed from listing photos and walkthrough video. Verify survey, zoning, geotechnical report and all dimensions before design development.

REVISIONS

NO.	DATE	DESCRIPTION
0	10.21.2026	SCHEMATIC DESIGN ISSUE

PROJECT NO.
2316-GS


ISSUE DATE
10.21.2026

SCALE
NTS

DRAWING SET
ARCH D - 36" x 24"

SHEET TITLE
DESIGN NARRATIVE & MATERIALS

SHEET
A0.1

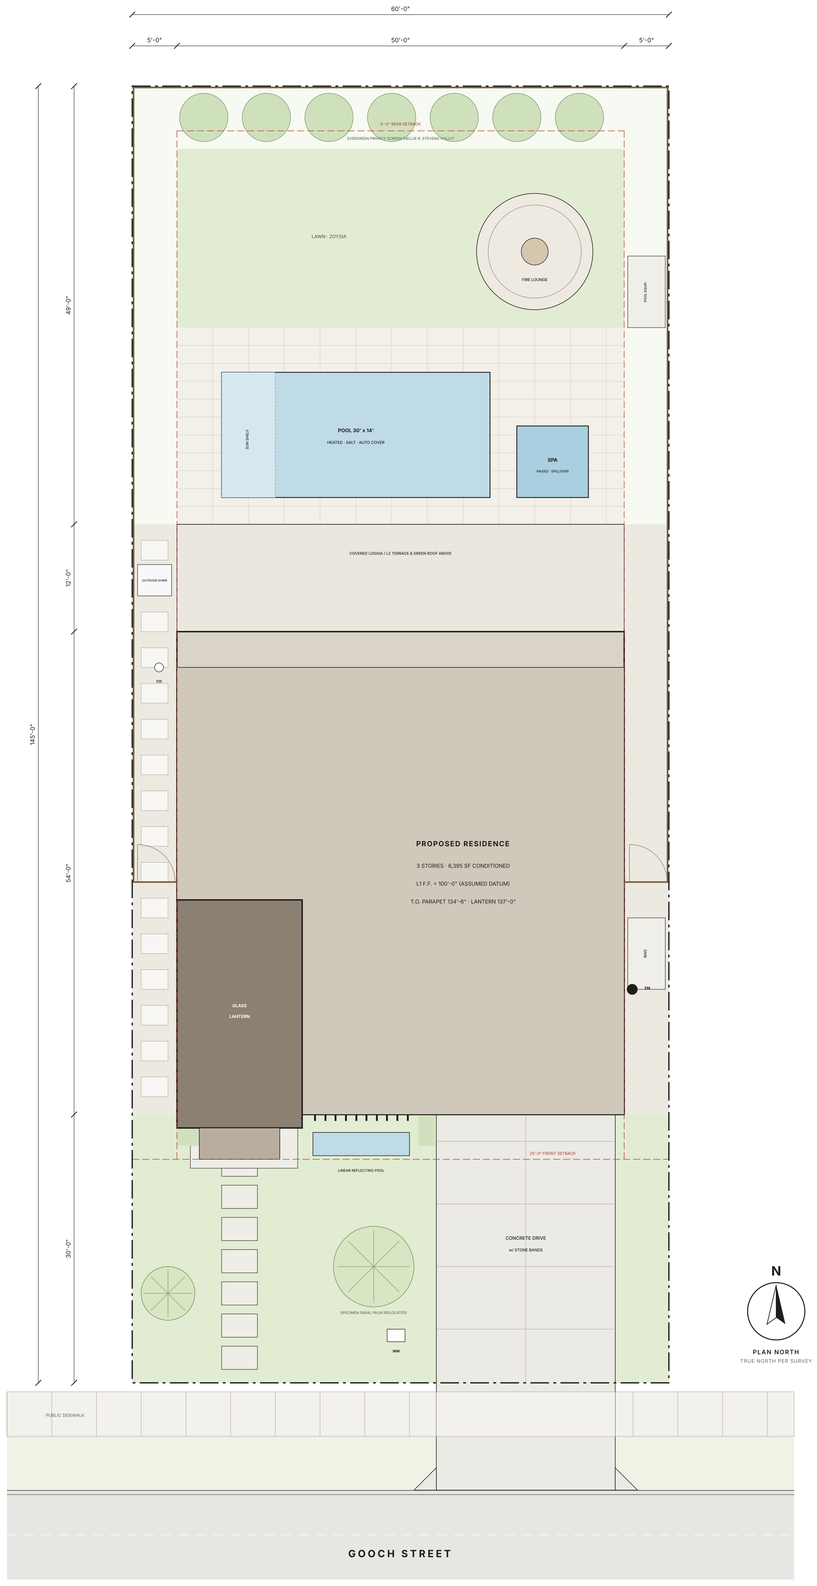

N

PLAN NORTH
TRUE NORTH PER SURVEY

SITE DATA


ITEM	DATA
Address	2316 Gooch Street, Dallas, TX 75241 (Dallas County)
Legal / subdivision	Alameda Heights — lot & block per survey
Lot area	8,700 SF (0.20 AC) — 60'-0" x 145'-0" ASSUMED
Zoning	R-7.5(A) single family ASSUMED — verify with City of Dallas
Setbacks (assumed)	Front 25'-0" · Side 5'-0" · Rear 5'-0"
Provided	Front 30'-0" to facade (25'-0" to canopy) · Sides 5'-0" · Rear 49'-0" to loggia
Building footprint	2,700 SF enclosed + 600 SF covered loggia = 3,300 SF
Lot coverage	37.9% (45% max typical — verify)
Building height	3 stories · 34'-6" T.O. parapet · 37'-0" T.O. lantern above L1 F.F.
Parking	2 enclosed (garage) + 2 on driveway
Utilities	City water & sewer, electric — all-electric house, no gas service
Soils	Expansive black clay (per listing) — geotechnical report required

SITE & LANDSCAPE DESIGN

- Arrival: offset porcelain stepping pads cross a turf front lawn to the pivot door under the bronze canopy; a linear reflecting pool with a scupper runs in front of the office fins.
- The specimen Sabal palm (existing) is relocated as the centerpiece of the front lawn; low agave, muhly grass and boxwood beds line the facade with integrated uplights.
- Driveway: 20'-0" concrete with stone bands; new curb cut and apron to City standards; EV-ready garage.
- Rear garden: covered loggia steps down to a porcelain pool deck, 30' x 14' heated salt pool with sun shelf, raised 8' x 8' spillover spa, lawn and a circular fire lounge.
- Privacy: 8'-0" horizontal cedar fence on side and rear property lines (verify height limits), evergreen holly screen along the rear, self-closing pool barrier gates at both side yards.
- Service: bins beside the garage side door; pool equipment screened at the rear right; outdoor shower by the loggia. Drainage: 5% slope for 10'-0" away from the house; downspouts to rain gardens.

LEGEND

- Pool / spa / reflecting pool
- Lawn & planting
- Concrete paving
- Porcelain pavers
- Building footprint / roof
- Gravel side yards
- PROPERTY LINE
- BUILDING SETBACK (ASSUMED)
- 8'-0" CEDAR FENCE / GATE
- WM water meter · EM electric meter · CO cleanout

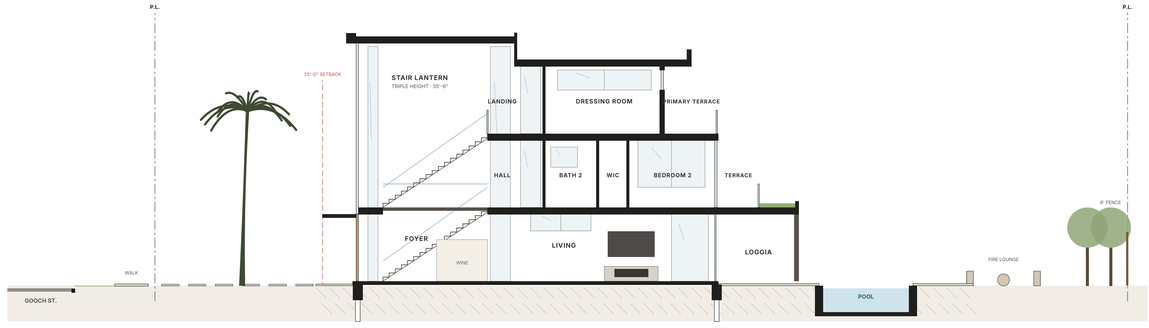

2 **SITE SECTION — GOOCH STREET TO REAR FENCE**
SCALE: 3/32" = 1'-0"

1 **ARCHITECTURAL SITE PLAN**
SCALE: 1/8" = 1'-0"

0' 4' 8' 16' 32'

VILLA GOOCH

THE LANTERN HOUSE

2316 GOOCH STREET
DALLAS, TEXAS 75241
ALAMEDA HEIGHTS · DALLAS COUNTY

OWNER

ARCHITECT OF RECORD

STRUCTURAL ENGINEER

MEP ENGINEER

SCHEMATIC DESIGN
NOT FOR CONSTRUCTION
Developed from listing photos and walkthrough video. Verify survey, zoning, geotechnical report and all dimensions before design development.

REVISIONS

NO.	DATE	DESCRIPTION
0	10.21.2026	SCHEMATIC DESIGN ISSUE

PROJECT NO.
2316-GS

ISSUE DATE
10.21.2026

SCALE
AS NOTED

DRAWING SET
ARCH D · 36" x 24"

SHEET TITLE
ARCHITECTURAL SITE PLAN

SHEET
A1.0



1 **LEVEL 1 FLOOR PLAN**
SCALE: 1/4" = 1'-0"

0' 2' 4' 8' 16'

N
PLAN NORTH
TRUE NORTH PER SURVEY

LEVEL 1 · ARRIVAL & LIVING

- Pivot door opens into the triple-height glass lantern: floating stair, chandelier and a straight view through the great room to the pool.
- Office behind a wood-fin screen and reflecting pool; glass wall to the foyer.
- Great room 50 ft wide: living with linear fireplace, dining for 10, chef's kitchen with 12-ft waterfall island.
- Service spine: garage > mudroom lockers > scullery & walk-in pantry > kitchen. Groceries never cross the living room.
- Powder room and dry bar sit off a side gallery, not the front door.
- 50 × 12 ft covered loggia with outdoor kitchen and fire table; three bays of pocketing lift-slide doors.
- Glass-enclosed, climate-controlled wine room under the stair.

ROOM SCHEDULE

NO.	ROOM	APPROX. SIZE	AREA (NET)	FLOOR
101	Foyer	13'-3" x 23'-8"	314 SF	F2
102	Office	12'-7" x 12'-6"	157 SF	F1
103	Coat	4'-11" x 4'-7"	22 SF	F1
104	Elev.	4'-11" x 5'-1"	25 SF	F2
105	Powder	7'-0" x 5'-1"	36 SF	F3
106	Bar	7'-0" x 4'-9"	34 SF	F1
107	Wine	3'-8" x 7'-7"	28 SF	F2
108	Living	15'-3" x 29'-3"	446 SF	F1
109	Dining	14'-0" x 21'-3"	298 SF	F1
110	Kitchen	19'-3" x 21'-0"	405 SF	F2
111	Scullery / Pantry	13'-0" x 7'-6"	98 SF	F2
112	Mudroom	8'-6" x 7'-6"	64 SF	F2
113	Garage	22'-0" x 23'-0"	506 SF	F4
114	Covered Loggia	50'-0" x 12'-0"	EXTERIOR	F5


LEVEL 1 GROSS CONDITIONED AREA: 2,148 SF · TOTAL HOUSE: 6,395 SF

LEGEND


- EXTERIOR WALL — 2×6 STUD + RAINSCREEN CLADDING
- INTERIOR PARTITION
- GLASS PARTITION / CURTAIN WALL
- FRAMELESS GLASS GUARD 42" A.F.F.
- WINDOW / GLAZED DOOR TAG — SEE A5.1
- DOOR TAG — SEE A5.1
- SECTION / ELEVATION REFERENCE
- OVERHEAD / ABOVE, OR HIGH WINDOW

GENERAL NOTES

- Dimensions to exterior face of sheathing and centerline of partitions. Ceilings 10'-0" typ.; baths/closets 9'-0".
- Stair: 18 risers @ 7-5/16", 17 treads @ 11", 3'-8" clear, lit treads; 42" glass guards on open sides.
- Elevator: ASME A17.1 §5.3 residential, 4 stops, 3'-0" entrance. Garage separation: 5/8" Type X, 20-min door.
- Every bedroom has a full-height glazed door to a balcony or terrace for emergency escape and rescue.

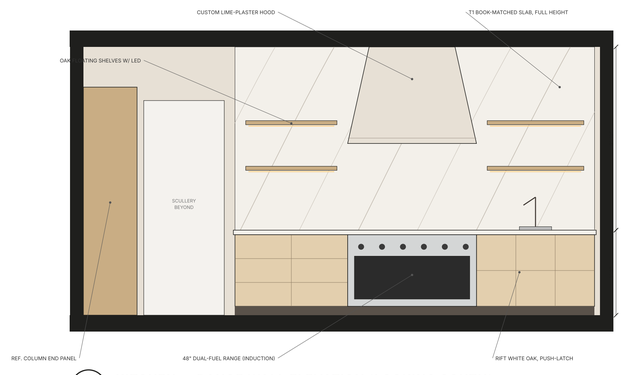

2 **KITCHEN — RANGE WALL ELEVATION (LOOKING SOUTH)**
SCALE: 3/8" = 1'-0"

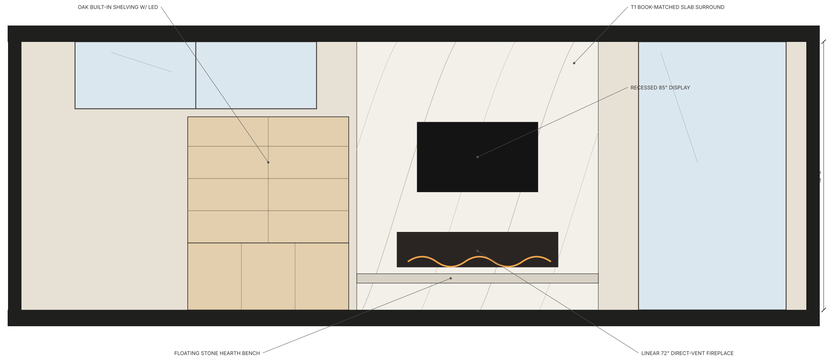

3 **LIVING — FIREPLACE WALL ELEVATION (LOOKING WEST)**
SCALE: 3/8" = 1'-0"

VILLA GOOCH

THE LANTERN HOUSE

2316 GOOCH STREET
DALLAS, TEXAS 75241
ALAMEDA HEIGHTS · DALLAS COUNTY

OWNER

ARCHITECT OF RECORD

STRUCTURAL ENGINEER

MEP ENGINEER

SCHEMATIC DESIGN
NOT FOR CONSTRUCTION
Developed from listing photos and walkthrough video. Verify survey, zoning, geotechnical report and all dimensions before design development.

REVISIONS

NO.	DATE	DESCRIPTION
0	10.21.2026	SCHEMATIC DESIGN ISSUE

PROJECT NO.
2316-GS

ISSUE DATE
10.21.2026


SCALE
AS NOTED

DRAWING SET
ARCH D · 36" x 24"

SHEET TITLE
LEVEL 1 FLOOR PLAN

SHEET
A2.1


A
A4.1
B
A4.1
GREEN ROOF
REAR TERRACE
W21
W21
W22
W22
W23
W23
BEDROOM 2
11'-6" x 12'-9"
BEDROOM 3
12'-1" x 12'-9"
BEDROOM 4
12'-1" x 12'-9"
BEDROOM 5
11'-6" x 12'-9"
W15
W15
W16
W16
W17
W17
W18
W18
W19
W19
D01
D02
D03
D04
D05
D06
D07
D08
D09
D10
D11
D12
D13
D14
D15
D16
D17
D18
D19
D20
D21
D22
D23
D24
D25
D26
D27
D28
D29
D30
D31
D32
D33
D34
D35
D36
D37
D38
D39
D40

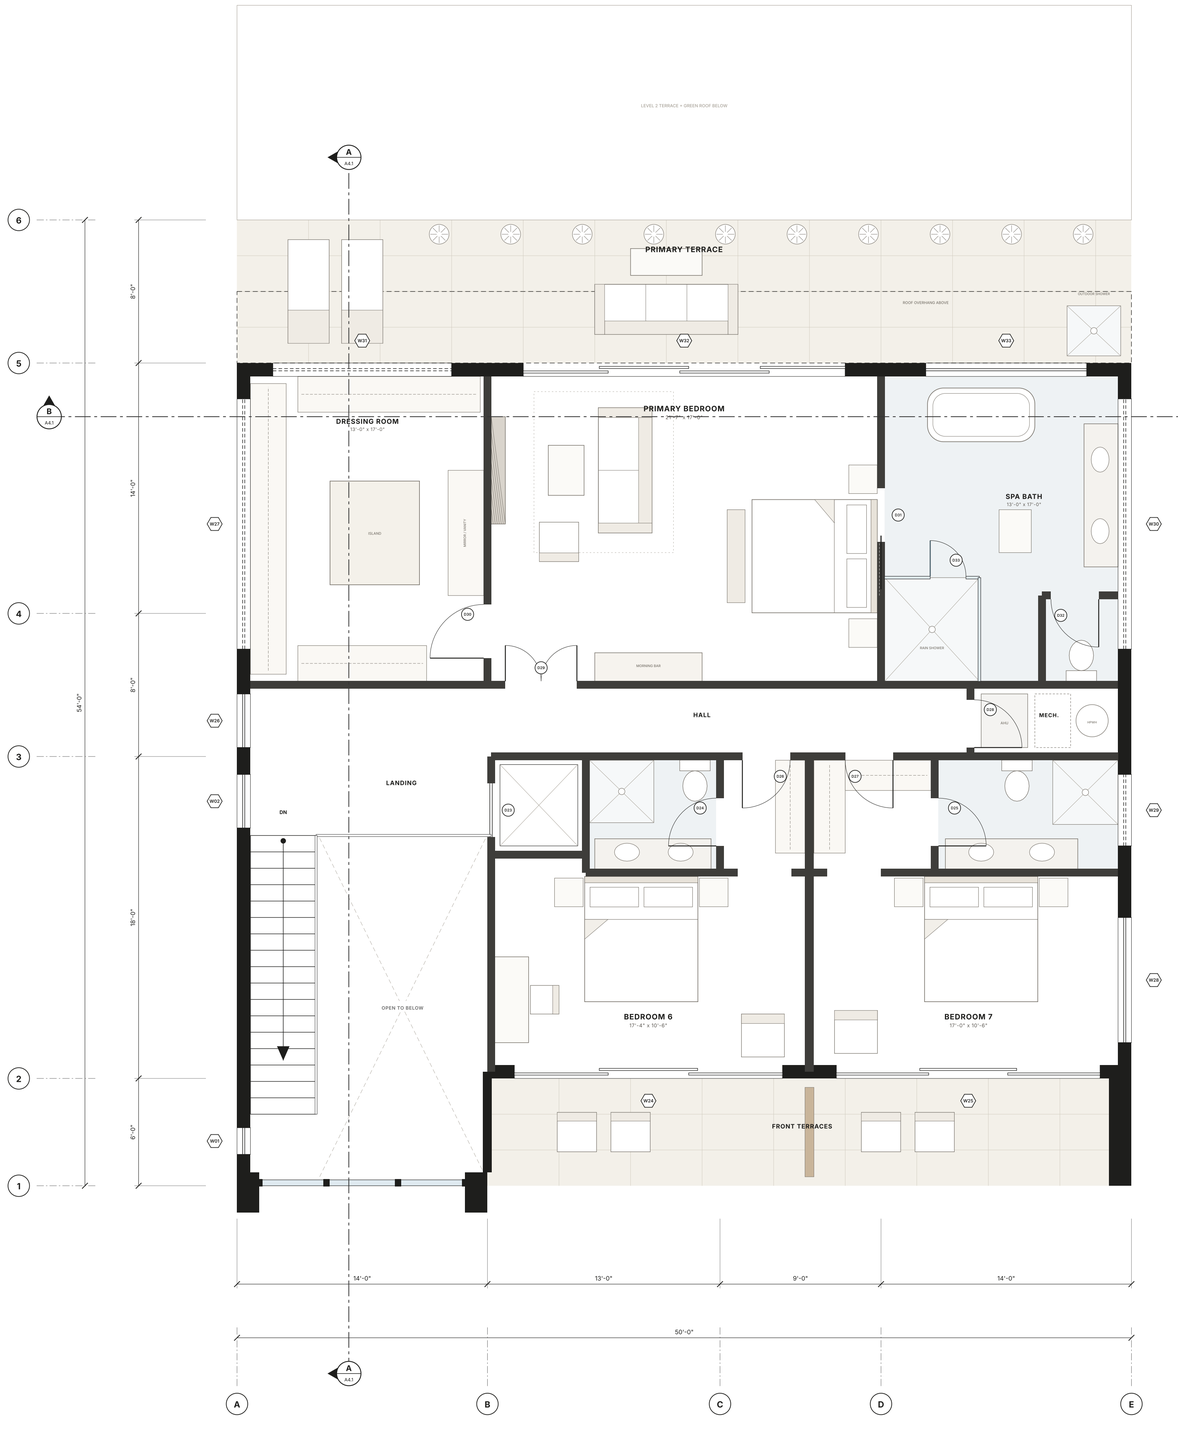

1 **LEVEL 3 FLOOR PLAN**
SCALE: 1/4" = 1'-0"

0' 2' 4' 8' 10'

N
PLAN NORTH
TRUE NORTH PER SURVEY

LEVEL 3 · PRIMARY RETREAT

- Primary retreat: 22 × 17 ft bedroom with fireplace and morning bar, dressing room with island, spa bath with freestanding tub, rain shower and private WC.
- 400 SF primary terrace under a cantilevered roof, with outdoor shower and planters.
- Bedrooms 6 and 7 each with en-suite bath, walk-through closet and a private front terrace.
- Mechanical / storage room with air handler, heat-pump water heater and roof hatch.

ROOM SCHEDULE

NO.	ROOM	APPROX. SIZE	AREA (NET)	FLOOR
301	Landing	13'-3" x 4'-5"	59 SF	F2
302	Bedroom 6	17'-4" x 10'-6"	183 SF	F1
303	Bath 6	7'-1" x 6'-1"	43 SF	F3
304	Bedroom 7	17'-0" x 10'-6"	179 SF	F1
305	Bath 7	10'-0" x 6'-1"	61 SF	F3
306	Hall	40'-3" x 4'-0"	161 SF	F1
307	Mech.	8'-0" x 3'-7"	29 SF	F4
308	Primary Bedroom	21'-7" x 17'-0"	368 SF	F1
309	Dressing Room	13'-0" x 17'-0"	222 SF	F1
310	Spa Bath	13'-0" x 17'-0"	222 SF	F3
311	Front Terraces	34'-9" x 6'-0"	EXTERIOR	F5
312	Primary Terrace	50'-0" x 8'-0"	EXTERIOR	F5


LEVEL 3 GROSS CONDITIONED AREA: 1,879 SF · TOTAL HOUSE: 6,395 SF

LEGEND


- EXTERIOR WALL — 2×6 STUD + RAINSCREEN CLADDING
- INTERIOR PARTITION
- GLASS PARTITION / CURTAIN WALL
- FRAMELESS GLASS GUARD 42" A.F.F.
- WINDOW / GLAZED DOOR TAG — SEE A5.1
- DOOR TAG — SEE A5.1
- SECTION / ELEVATION REFERENCE
- OVERHEAD / ABOVE, OR HIGH WINDOW

GENERAL NOTES

- Dimensions to exterior face of sheathing and centerline of partitions. Ceilings 10'-0" typ.; baths/closets 9'-0".
- Stair: 18 risers @ 7-5/16", 17 treads @ 11", 3'-8" clear, lit treads; 42" glass guards on open sides.
- Elevator: ASME A17.1 §5.3 residential, 4 stops, 3'-0" entrance. Garage separation: 5/8" Type X, 20-min door.
- Every bedroom has a full-height glazed door to a balcony or terrace for emergency escape and rescue.

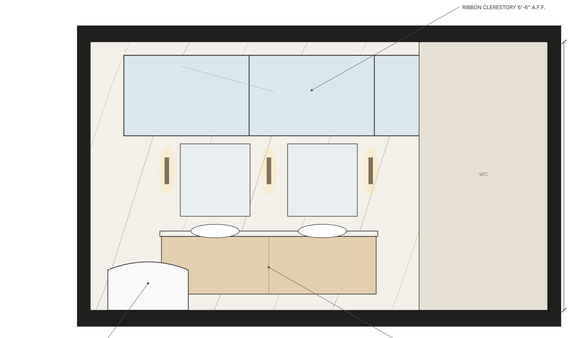

2 **PRIMARY SPA BATH — VANITY WALL (LOOKING EAST)**
SCALE: 3/8" = 1'-0"

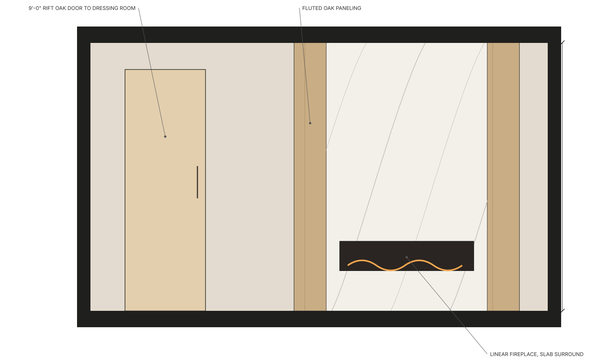

3 **PRIMARY BEDROOM — FIREPLACE WALL (LOOKING WEST)**
SCALE: 3/8" = 1'-0"

VILLA GOOCH

THE LANTERN HOUSE

2316 GOOCH STREET
DALLAS, TEXAS 75241
ALAMEDA HEIGHTS · DALLAS COUNTY

OWNER

ARCHITECT OF RECORD

STRUCTURAL ENGINEER

MEP ENGINEER

SCHEMATIC DESIGN
NOT FOR CONSTRUCTION
Developed from listing photos and walkthrough video. Verify survey, zoning, geotechnical report and all dimensions before design development.

REVISIONS

NO.	DATE	DESCRIPTION
0	10.21.2026	SCHEMATIC DESIGN ISSUE

PROJECT NO.
2316-GS


ISSUE DATE
10.21.2026

SCALE
AS NOTED

DRAWING SET
ARCH D · 36" x 24"

SHEET TITLE
LEVEL 3 FLOOR PLAN

SHEET
A2.3

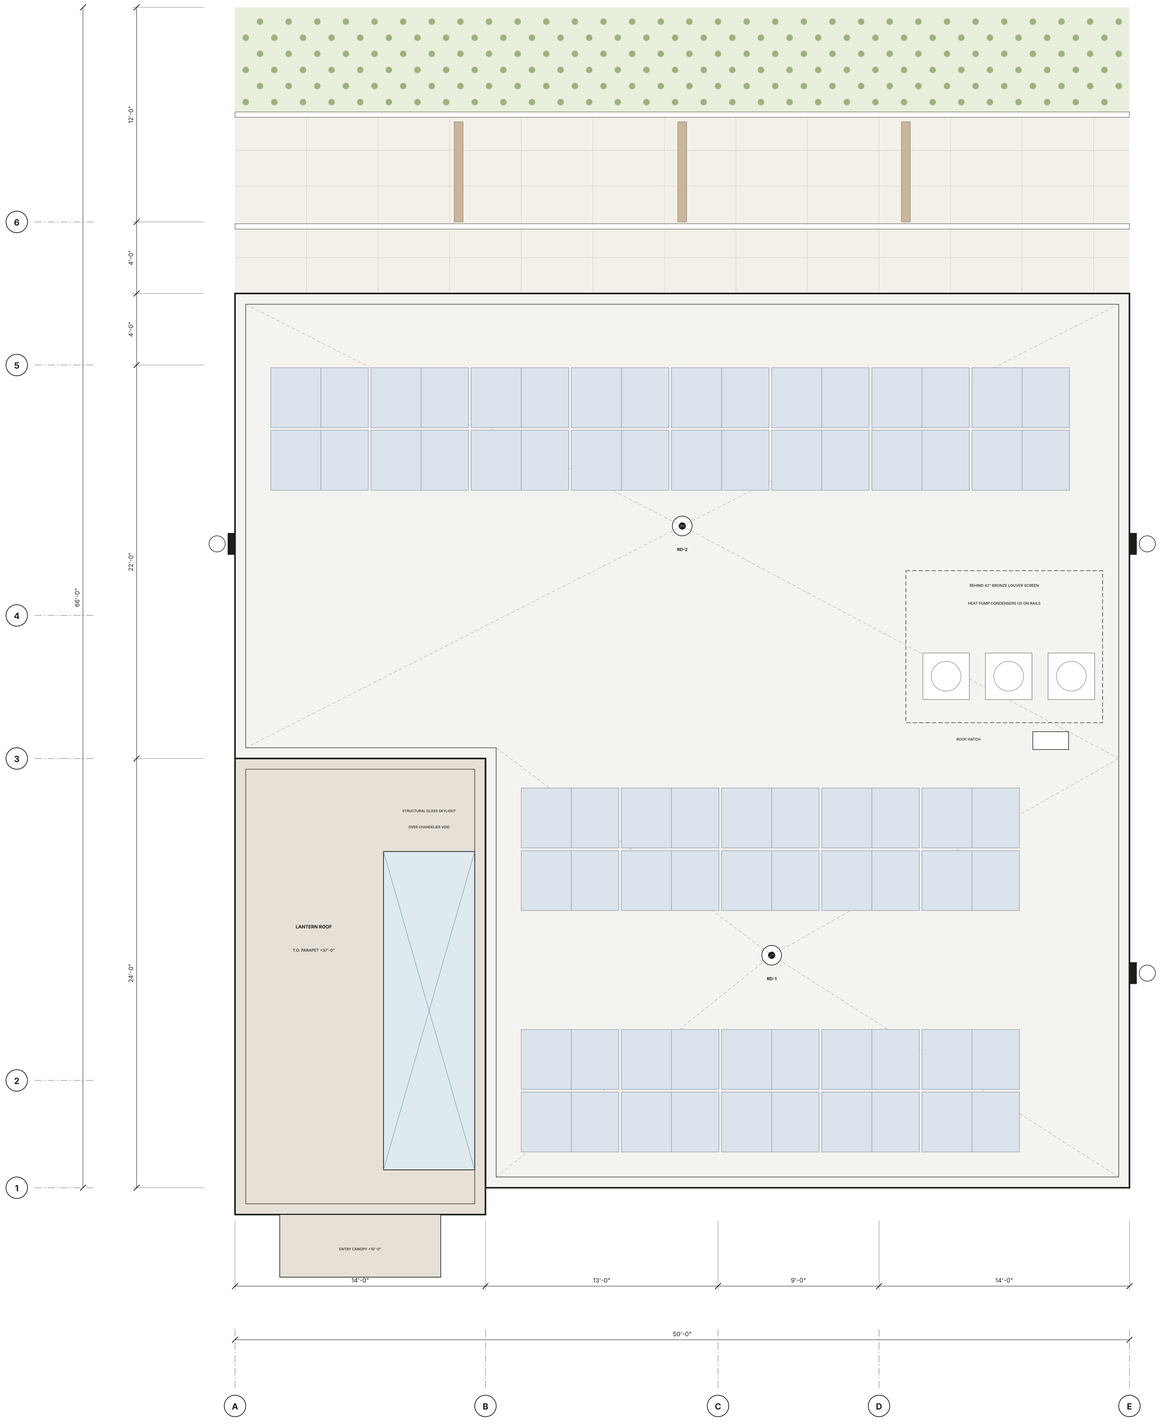

1 ROOF PLAN

SCALE: 1/4" = 1'-0"

0' 2' 4' 8' 16'

N

PLAN NORTH


TRUE NORTH PER SURVEY

ROOF STRATEGY

- Main roof: single-ply PVC (white, SRI ≥ 100) over tapered polyiso to two internal drains (RD-1, RD-2), 1/4" per foot minimum; overflow scuppers through parapets to bronze conductor heads.
- Photovoltaic array: 36 modules x ≈400 W = ≈14.4 kW DC on ballasted racking, set back 3'-0" from parapets for access; battery and inverter in the garage.
- Heat-pump condensers (one per level) on vibration-isolated rails behind a 42" bronze louver screen; refrigerant lines drop through the mechanical room.
- Roof hatch (30" x 54") with fall-protection rail from the Level 3 mechanical room.
- Lantern roof raised to +37'-0" with a structural-glass skylight over the chandelier void; motorized shade.
- Terraces over conditioned space: porcelain pavers on pedestals over hot-applied waterproofing and tapered insulation; Level 2 terrace on the loggia roof with an extensive sedum green roof beyond.
- Parapet 1'-6" above roof deck (no roof occupancy); 42" guards at all accessible terraces.


ROOF LEVELS

ROOF AREA	ELEVATION	ASSEMBLY
Lantern roof / parapet	+36'-6" / +37'-0"	PVC, structural glass skylight
Main roof / parapet	+33'-0" / +34'-6"	PVC, PV array, equipment
Level 3 terraces	+22'-0"	Pavers on pedestals
Level 2 terrace	+11'-0"	Pavers on pedestals
Green roof (loggia)	+11'-0"	Sedum trays, gravel edge
Entry canopy	+10'-0"	Bronze blade, integral drain

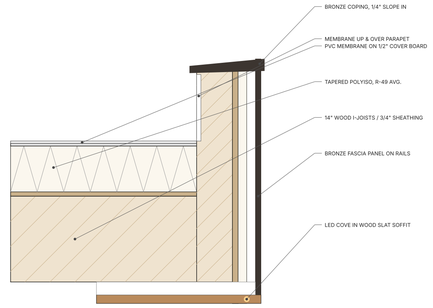

2 PARAPET & ROOF EDGE DETAIL

SCALE: 1" = 1'-0"

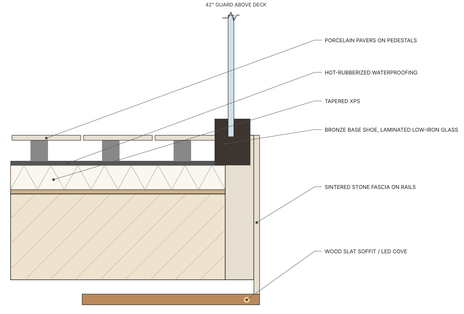

3 TERRACE EDGE & GLASS GUARD DETAIL

SCALE: 1" = 1'-0"

VILLA GOOCH

THE LANTERN HOUSE

2316 GOOCH STREET
DALLAS, TEXAS 75241
ALAMEDA HEIGHTS · DALLAS COUNTY

OWNER

ARCHITECT OF RECORD

STRUCTURAL ENGINEER

MEP ENGINEER

SCHEMATIC DESIGN

NOT FOR CONSTRUCTION

Developed from listing photos and walkthrough video. Verify survey, zoning, geotechnical report and all dimensions before design development.

REVISIONS

NO.	DATE	DESCRIPTION
0	10.21.2026	SCHEMATIC DESIGN ISSUE

PROJECT NO.
2316-GS


ISSUE DATE
10.21.2026

SCALE
AS NOTED

DRAWING SET
ARCH D · 36" x 24"

SHEET TITLE
ROOF PLAN

SHEET
A2.4

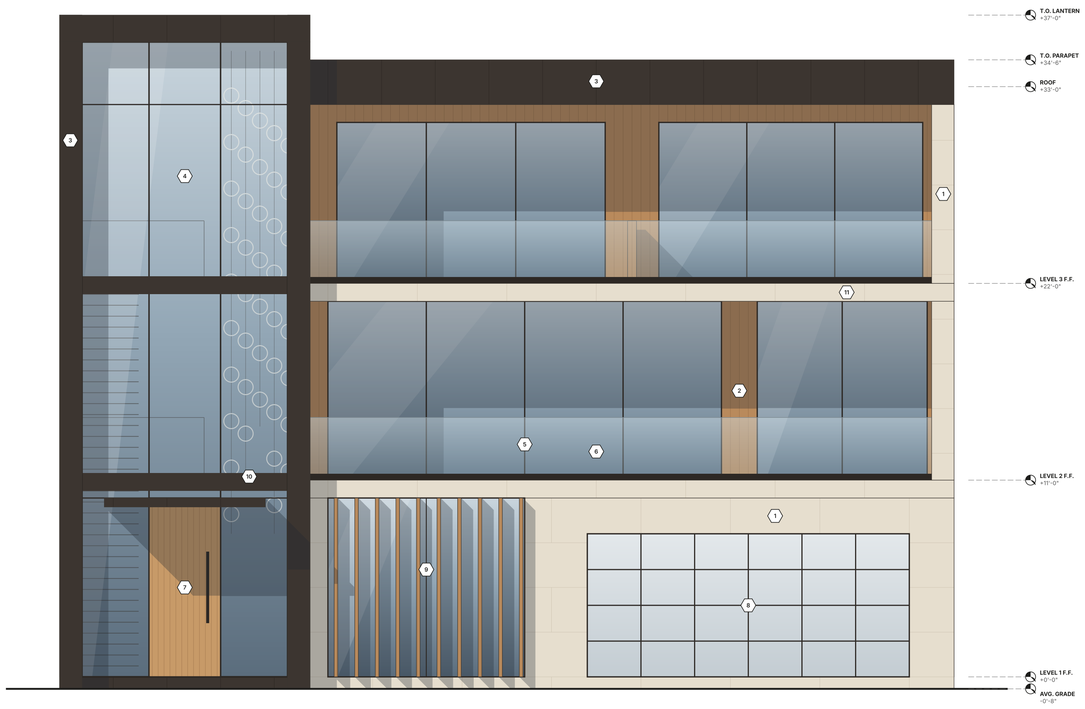

1 **FRONT ELEVATION — GOOCH STREET**

SCALE: 1/4" = 1'-0"



2 **REAR ELEVATION — GARDEN**

SCALE: 1/4" = 1'-0"


KEYNOTES

1. Sintered-stone rainscreen panels, 5'x10' warm limestone finish, 1/4" open joints
2. Thermally-modified ash cladding, vertical shiplap, natural oil finish
3. Dark bronze anodized aluminum: lantern frame, fascia and panels
4. Structural glass curtain wall, low-iron low-E insulated units, bronze caps
5. Lift-slide door system, thermally broken, dark bronze frame
6. Frameless glass guard, 42" A.F.F., laminated, bronze base shoe
7. Pivot entry door, rift white oak, 4'-0" x 10'-0", bronze pull
8. Overhead garage door, bronze frame, satin-etched glass
9. Wood fin screen, 2" x 10" thermally-modified ash @ 13" o.c.
10. Cantilevered bronze entry canopy with integral downlights
11. Wood slat soffit with continuous LED cove (2700K)
12. Extensive sedum green roof with stone ballast edge
13. Steel column, 8" square, bronze powder coat
14. Casement / awning windows, dark bronze frame
15. Wood privacy fins between terraces


ELEVATION NOTES

- Shadows are cast at 45° for depth reading only; true solar orientation to be confirmed by survey.
- Stone panel joints align to window heads, sills and floor lines; 1/4" open joints with black EPDM backer.
- All glazing low-E, argon filled; low-iron glass at the lantern curtain wall and guards.
- Exterior lighting: 2700K, full cutoff, dark-sky compliant; LED coves at all wood soffits.
- Parapet tops capped in bronze; scuppers and conductor heads on side elevations only.

EXTERIOR MATERIALS



SINTERED STONE



THERMO-ASH



DARK BRONZE



LOW-IRON GLASS

VILLA GOOCH

THE LANTERN HOUSE

2316 GOOCH STREET
DALLAS, TEXAS 75241
ALAMEDA HEIGHTS · DALLAS COUNTY

OWNER

ARCHITECT OF RECORD

STRUCTURAL ENGINEER

MEP ENGINEER

SCHEMATIC DESIGN

NOT FOR CONSTRUCTION

Developed from listing photos and walkthrough video. Verify survey, zoning, geotechnical report and all dimensions before design development.

REVISIONS

NO.	DATE	DESCRIPTION
0	10.21.2026	SCHEMATIC DESIGN ISSUE

PROJECT NO.
2316-GS


ISSUE DATE
10.21.2026

SCALE
1/4" = 1'-0"

DRAWING SET
ARCH D · 36" x 24"

SHEET TITLE
FRONT & REAR ELEVATIONS

SHEET
A3.1

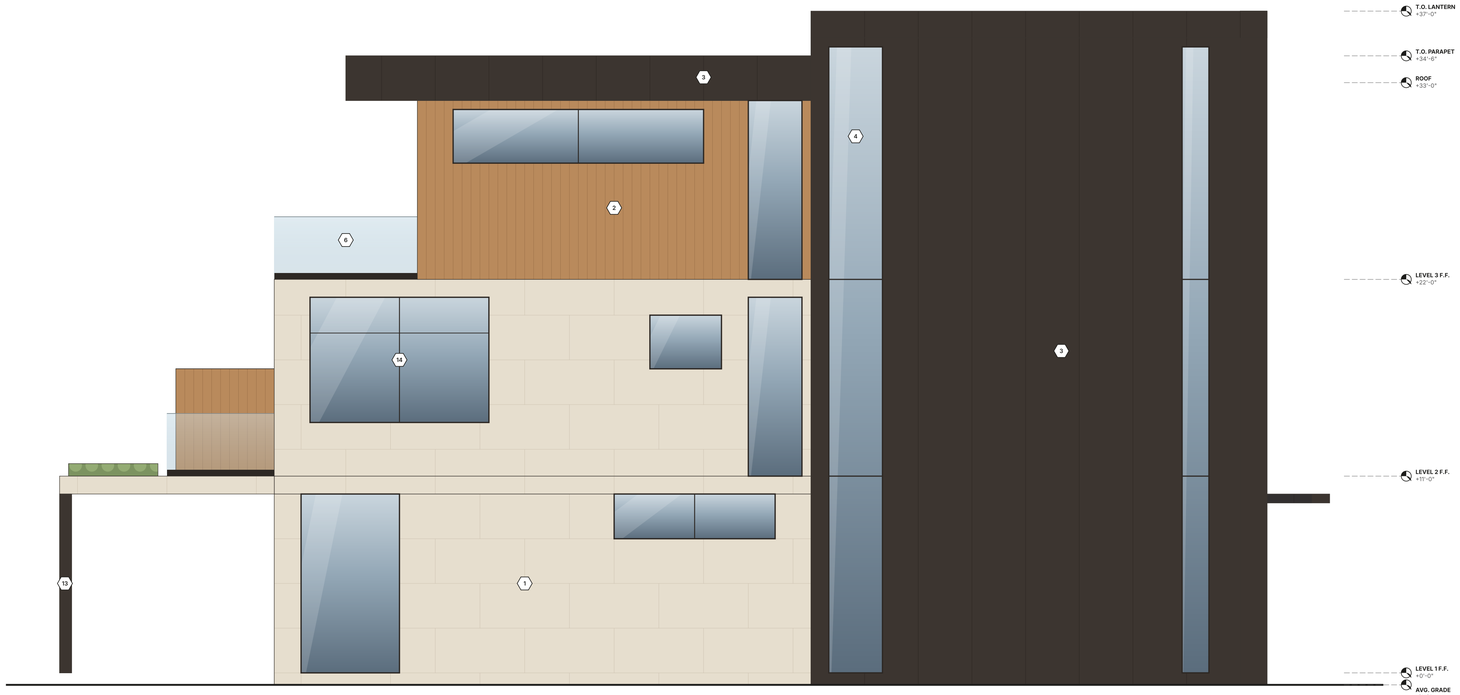

1 **LEFT SIDE ELEVATION**

SCALE: 1/4" = 1'-0"



2 **RIGHT SIDE ELEVATION**

SCALE: 1/4" = 1'-0"

KEYNOTES

1. Sintered-stone rainscreen panels, 5'x10' warm limestone finish, 1/4" open joints
2. Thermally-modified ash cladding, vertical shiplap, natural oil finish
3. Dark bronze anodized aluminum: lantern frame, fascia and panels
4. Structural glass curtain wall, low-iron low-E insulated units, bronze caps
5. Lift-slide door system, thermally broken, dark bronze frame
6. Frameless glass guard, 42" A.F.F., laminated, bronze base shoe
7. Pivot entry door, rift white oak, 4'-0" x 10'-0", bronze pull
8. Overhead garage door, bronze frame, satin-etched glass
9. Wood fin screen, 2" x 10" thermally-modified ash @ 13" o.c.
10. Cantilevered bronze entry canopy with integral downlights
11. Wood slat soffit with continuous LED cove (2700K)
12. Extensive sedum green roof with stone ballast edge
13. Steel column, 8" square, bronze powder coat
14. Casement / awning windows, dark bronze frame
15. Wood privacy fins between terraces


ELEVATION NOTES

- Shadows are cast at 45° for depth reading only; true solar orientation to be confirmed by survey.
- Stone panel joints align to window heads, sills and floor lines; 1/4" open joints with black EPDM backer.
- All glazing low-E, argon filled; low-iron glass at the lantern curtain wall and guards.
- Exterior lighting: 2700K, full cutoff, dark-sky compliant; LED coves at all wood soffits.
- Parapet tops capped in bronze; scuppers and conductor heads on side elevations only.

EXTERIOR MATERIALS



SINTERED STONE



THERMO-ASH



DARK BRONZE



LOW-IRON GLASS

VILLA GOOCH

THE LANTERN HOUSE

2316 GOOCH STREET
DALLAS, TEXAS 75241
ALAMEDA HEIGHTS · DALLAS COUNTY

OWNER

ARCHITECT OF RECORD

STRUCTURAL ENGINEER

MEP ENGINEER

SCHEMATIC DESIGN

NOT FOR CONSTRUCTION

Developed from listing photos and walkthrough video. Verify survey, zoning, geotechnical report and all dimensions before design development.

REVISIONS

NO.	DATE	DESCRIPTION
0	10.21.2026	SCHEMATIC DESIGN ISSUE

PROJECT NO.
2316-GS

ISSUE DATE
10.21.2026

SCALE
1/4" = 1'-0"

DRAWING SET
ARCH D - 36" x 24"

SHEET TITLE
SIDE ELEVATIONS

SHEET
A3.2



A **LONGITUDINAL SECTION A — THROUGH LANTERN, LIVING & POOL**
SCALE: 1/4" = 1'-0"



TYPICAL ASSEMBLIES

- ROOF: PVC membrane, 1/2" cover board, tapered polyiso R-49 avg., vapor retarder, 3/4" sheathing on wood I-joists; gypsum ceiling. Parapet capped in bronze.
- EXTERIOR WALL: sintered stone or thermo-ash on aluminum rainscreen rails, 1-1/2" mineral wool c.i., WRB, 1/2" sheathing, 2×6 studs @ 16" o.c. with R-23, 5/8" gypsum.
- FLOORS: 1/2" engineered oak (or porcelain), acoustic underlayment, 1-1/8" subfloor on 14" open-web trusses, R-19 sound batts, resilient channel, 5/8" gypsum.
- TERRACES OVER CONDITIONED SPACE: pavers on pedestals, drainage mat, hot-rubberized waterproofing, tapered XPS.
- FOUNDATION: post-tensioned slab on 15-mil vapor barrier, perimeter grade beams on drilled piers; final design per geotechnical report (expansive clay, PI > 40 anticipated).
- LANTERN: steel moment frame, bronze-capped curtain wall with laminated low-iron IGUs, steel-plate glass bridge with 42" laminated glass guard.

B **TRANSVERSE SECTION B — GREAT ROOM, SUITES & PRIMARY**
SCALE: 1/4" = 1'-0"

VILLA GOOCH

THE LANTERN HOUSE

2316 GOOCH STREET
DALLAS, TEXAS 75241
ALAMEDA HEIGHTS · DALLAS COUNTY

OWNER

ARCHITECT OF RECORD

STRUCTURAL ENGINEER

MEP ENGINEER

SCHEMATIC DESIGN
NOT FOR CONSTRUCTION
Developed from listing photos and walkthrough video. Verify survey, zoning, geotechnical report and all dimensions before design development.

REVISIONS

NO.	DATE	DESCRIPTION
0	10.21.2026	SCHEMATIC DESIGN ISSUE

PROJECT NO.
2316-GS

ISSUE DATE
10.21.2026

SCALE
1/4" = 1'-0"

DRAWING SET
ARCH D · 36" x 24"

SHEET TITLE
BUILDING SECTIONS

SHEET
A4.1

DOOR SCHEDULE

MARK	LVL	LOCATION	TYPE	SIZE W x H	NOTES
D01	L1	Foyer	Pivot	4'-0" x 10'-0"	Pivot entry door, rift white oak, concealed pivot, 4'-0" x 10'-0"
D02	L1	Garage	Overhead	18'-0" x 8'-0"	Insulated overhead door, bronze frame, satin-etched glass
D03	L1	Garage	Exterior swing	3'-0" x 7'-0"	Insulated steel side door to service yard
D04	L1	Office	Glass swing	3'-0" x 9'-0"	Solid-core, flush, paint-grade; concealed hinges
D05	L1	Coat Closet	Bifold pair	4'-0" x 8'-0"	Rift oak bifold
D06	L1	Elevator	Elevator entrance	3'-0" x 7'-0"	By elevator mfr.
D07	L1	Powder	Flush swing	2'-8" x 8'-0"	Solid-core, flush, paint-grade; concealed hinges
D08	L1	Mudroom	20-min self-closing	3'-0" x 8'-0"	Solid-core, flush, paint-grade; concealed hinges
D09	L1	Scullery	Pocket	3'-0" x 8'-0"	Solid-core pocket, soft-close
D10	L1	Wine Room	Glass swing, insulated	2'-6" x 7'-0"	Solid-core, flush, paint-grade; concealed hinges
D11	L2	Elevator	Elevator entrance	3'-0" x 7'-0"	By elevator mfr.
D12	L2	Laundry	Flush swing	3'-0" x 8'-0"	Solid-core, flush, paint-grade; concealed hinges
D13	L2	Study	Flush swing	2'-6" x 8'-0"	Solid-core, flush, paint-grade; concealed hinges
D14	L2	Linen	Flush swing	3'-0" x 8'-0"	Solid-core, flush, paint-grade; concealed hinges
D15	L2	Bedroom 2	Flush swing	2'-8" x 8'-0"	Solid-core, flush, paint-grade; concealed hinges
D16	L2	Bedroom 3	Flush swing	2'-8" x 8'-0"	Solid-core, flush, paint-grade; concealed hinges
D17	L2	Bedroom 4	Flush swing	2'-8" x 8'-0"	Solid-core, flush, paint-grade; concealed hinges
D18	L2	Bedroom 5	Flush swing	2'-8" x 8'-0"	Solid-core, flush, paint-grade; concealed hinges
D19	L2	Bath 2	Pocket	2'-6" x 8'-0"	Solid-core pocket, soft-close
D20	L2	Bath 3	Pocket	2'-6" x 8'-0"	Solid-core pocket, soft-close
D21	L2	Bath 4	Pocket	2'-6" x 8'-0"	Solid-core pocket, soft-close
D22	L2	Bath 5	Pocket	2'-6" x 8'-0"	Solid-core pocket, soft-close
D23	L3	Elevator	Elevator entrance	3'-0" x 7'-0"	By elevator mfr.
D24	L3	Bath 6	Flush swing	2'-8" x 8'-0"	Solid-core, flush, paint-grade; concealed hinges
D25	L3	Bath 7	Flush swing	2'-8" x 8'-0"	Solid-core, flush, paint-grade; concealed hinges
D26	L3	Bedroom 6	Flush swing	2'-8" x 8'-0"	Solid-core, flush, paint-grade; concealed hinges
D27	L3	Bedroom 7	Flush swing	2'-8" x 8'-0"	Solid-core, flush, paint-grade; concealed hinges
D28	L3	Mech / Storage	Louvered swing	2'-8" x 8'-0"	Solid-core, flush, paint-grade; concealed hinges
D29	L3	Primary Suite	Pair, rift oak	4'-0" x 9'-0"	Rift oak pair, 9' tall
D30	L3	Dressing Room	Flush swing	3'-0" x 9'-0"	Solid-core, flush, paint-grade; concealed hinges
D31	L3	Primary Bath	Pocket, rift oak	3'-0" x 9'-0"	Solid-core pocket, soft-close
D32	L3	Primary WC	Flush swing	2'-8" x 8'-0"	Solid-core, flush, paint-grade; concealed hinges
D33	L3	Primary Shower	Frameless glass	2'-0" x 7'-6"	Solid-core, flush, paint-grade; concealed hinges

FINISH LEGEND

F1 Wide-plank European white oak, engineered 10" plank, matte natural oil

F2 Porcelain 48"x48", warm limestone finish, 1/16" joints

F3 Book-matched porcelain slab floor, honed, sloped to linear drains

F4 Sealed concrete with flake epoxy coating

F5 Exterior porcelain pavers 24"x48" on pedestals over waterproofing

F6 Extensive sedum tray green roof over root barrier

B1 Flush reveal base (shadow line), painted

B2 Porcelain cove base to match floor

P1 Level 5 gypsum board, eggshell paint, warm white

P2 Venetian lime plaster, hand-troweled, feature walls

P3 5/8" Type X gypsum board, painted (garage/dwelling separation)

T1 Book-matched porcelain slab walls / backsplash, full height

W1 Rift white oak paneling and millwork

C1 Level 5 gypsum board ceiling, flat white, recessed trimless lighting

C2 Exterior thermally-modified wood slat soffit with LED cove

C3 5/8" Type X gypsum board ceiling (habitable space above)

WINDOW & GLAZED DOOR SCHEDULE

MARK	LVL	ELEV.	ROOM	TYPE	W x H	SILL	NOTES
W01	ALL	LEFT	Lantern	Fixed slot	1'-6" x 35'-0"	0'-0"	Full-height glazed light slot at lantern front
W02	ALL	LEFT	Lantern	Fixed slot	3'-0" x 35'-0"	0'-0"	Full-height glazed light slot at stair landings
W03	L1	FRONT	Office	Fixed	11'-0" x 10'-0"	0'-0"	Fixed storefront behind wood fin screen
W04	L1	LEFT	Living	Casement / awning	9'-0" x 2'-6"	7'-6"	Clerestory awning
W05	L1	LEFT	Living	Fixed	5'-6" x 10'-0"	0'-0"	Floor-to-ceiling corner light
W06	L1	RIGHT	Scullery	Casement / awning	5'-0" x 3'-0"	4'-0"	Casement over prep sink
W07	L1	RIGHT	Kitchen	Fixed	5'-6" x 10'-0"	0'-0"	Floor-to-ceiling light
W08	L1	REAR	Living	Lift-slide door	13'-0" x 10'-0"	0'-0"	Lift-slide, pocketing, to loggia
W09	L1	REAR	Dining	Lift-slide door	10'-0" x 10'-0"	0'-0"	Lift-slide to loggia
W10	L1	REAR	Kitchen	Lift-slide door	16'-0" x 10'-0"	0'-0"	Lift-slide, pocketing, to outdoor kitchen
W11	L2	FRONT	Family Lounge	Lift-slide door	22'-0" x 10'-0"	0'-0"	Lift-slide to covered front balcony
W12	L2	FRONT	Study	Lift-slide door	9'-6" x 10'-0"	0'-0"	Lift-slide to covered front balcony
W13	L2	LEFT	Hall	Fixed	3'-0" x 10'-0"	0'-0"	Full-height hall slot
W14	L2	LEFT	Bath 2	Casement / awning	4'-0" x 3'-0"	6'-0"	High awning, obscure glass
W15	L2	LEFT	Bedroom 2	Casement / awning	10'-0" x 7'-0"	3'-0"	Casement pair
W16	L2	RIGHT	Study	Casement / awning	5'-0" x 6'-0"	3'-0"	Casement
W17	L2	RIGHT	Laundry	Casement / awning	5'-0" x 3'-6"	5'-6"	High awning
W18	L2	RIGHT	Bath 5	Casement / awning	4'-0" x 3'-0"	6'-0"	High awning, obscure glass
W19	L2	RIGHT	Bedroom 5	Casement / awning	10'-0" x 7'-0"	3'-0"	Casement pair
W20	L2	REAR	Bedroom 2	Lift-slide door	8'-0" x 10'-0"	0'-0"	Lift-slide to rear terrace
W21	L2	REAR	Bedroom 3	Lift-slide door	8'-0" x 10'-0"	0'-0"	Lift-slide to rear terrace
W22	L2	REAR	Bedroom 4	Lift-slide door	8'-0" x 10'-0"	0'-0"	Lift-slide to rear terrace
W23	L2	REAR	Bedroom 5	Lift-slide door	8'-0" x 10'-0"	0'-0"	Lift-slide to rear terrace
W24	L3	FRONT	Bedroom 6	Lift-slide door	15'-0" x 9'-0"	0'-0"	Lift-slide to front terrace
W25	L3	FRONT	Bedroom 7	Lift-slide door	14'-9" x 9'-0"	0'-0"	Lift-slide to front terrace
W26	L3	LEFT	Hall	Fixed	3'-0" x 10'-0"	0'-0"	Full-height hall slot
W27	L3	LEFT	Dressing Room	Casement / awning	14'-0" x 3'-0"	6'-6"	Ribbon clerestory
W28	L3	RIGHT	Bedroom 7	Casement / awning	7'-0" x 6'-0"	3'-0"	Casement pair
W29	L3	RIGHT	Bath 7	Casement / awning	4'-0" x 3'-0"	6'-0"	High awning, obscure glass
W30	L3	RIGHT	Primary Bath	Casement / awning	14'-0" x 3'-0"	6'-6"	Ribbon clerestory
W31	L3	REAR	Dressing Room	Casement / awning	10'-0" x 3'-0"	6'-6"	Ribbon clerestory
W32	L3	REAR	Primary Bedroom	Lift-slide door	18'-0" x 9'-0"	0'-0"	Lift-slide, pocketing, to primary terrace
W33	L3	REAR	Primary Bath	Fixed	9'-0" x 6'-0"	3'-0"	Fixed picture window at tub, privacy film

All units: thermally broken aluminum, dark bronze anodized; low-E argon IGU (U ≈ 0.30, SHGC ≈ 0.25); tempered/laminated where required by IRC R308; egress per R310. Verify rough openings with mfr.

AREAS

AREA TABULATION	AREA
Level 1 — conditioned	2,148 SF
Level 2 — conditioned	2,368 SF
Level 3 — conditioned	1,879 SF
TOTAL CONDITIONED	6,395 SF
Garage	552 SF
Covered loggia	600 SF
Level 2 front balcony (covered)	208 SF
Level 2 rear terrace	300 SF
Green roof	300 SF
Level 3 front terraces	208 SF
Level 3 primary terrace	400 SF
Lot coverage (2,700 + 600 loggia / 8,700)	37.9%

Gross areas to exterior face of sheathing; lantern void and stair openings above the lowest level excluded.

CODE & ZONING CHECKLIST — IRC 2021 W/ DALLAS AMENDMENTS (PRELIMINARY)

ITEM	REQUIREMENT (VERIFY WITH CITY OF DALLAS)	DESIGN RESPONSE
Emergency escape (R310)	Opening ≥ 5.7 SF net, sill ≤ 44" in every sleeping room	Full-height lift-slide door to a balcony or terrace in all 7 bedrooms
Stairs (R311.7)	Riser ≤ 7-3/4", tread ≥ 10", width ≥ 36", headroom ≥ 6'-8"	7-5/16" risers, 11" treads, 3'-8" clear, ≥ 10'-0" headroom
Guards (R312)	36" min where drop > 30"; 4" sphere rule	42" laminated glass guards at stair, bridge and terraces
Garage separation (R302.6)	1/2" gyp walls; 5/8" Type X ceiling with habitable space above	5/8" Type X walls and ceiling; 20-min self-closing door
Smoke & CO alarms (R314/R315)	Interconnected: each bedroom, outside sleeping areas, each story	Hard-wired, interconnected, battery backup throughout
Fire sprinklers (R313)	Per Dallas amendments	NFPA 13D system recommended for the 3-story open lantern
Elevator (ASME A17.1 §5.3)	Residential elevator, shaft & pit per mfr.	4 stops, 3'-0" entrance, dedicated circuit
Safety glazing (R308)	Doors, wet areas, near stairs & landings	Tempered / laminated as scheduled
Pool barrier (ISPSC / App. AG)	48" barrier, self-closing gates, door alarms	Fences + self-latching gates; alarms on L1 lift-slides; auto pool cover
Energy (IECC 2021, zone 3A)	Walls R-20 or 13+5, ceiling R-38, U ≤ 0.30, SHGC ≤ 0.25	R-23 + R-7.5 c.i. walls, R-49 roof, U ≤ 0.30 / SHGC ≤ 0.25 glazing
Zoning height (assumed R-7.5(A))	30'-0" maximum	34'-6" / 37'-0" — VERIFY DISTRICT; variance or SUP may be required
Lot coverage (assumed)	45% maximum	37.9% provided

ROOM FINISH SCHEDULE

NO.	ROOM	FLR	BASE	WALLS	CLG	CLG HT
101	Foyer	F2	B1	P2	C1	TRIPLE HT.
102	Office	F1	B1	P1	C1	10'-0"
103	Coat	F1	B1	P1 / W1	C1	9'-0"
104	Elev.	F2	-	W1	BY MFR.	-
105	Powder	F3	B2	T1 / P1	C1	9'-0"
106	Bar	F1	B1	P1	C1	10'-0"
107	Wine	F2	-	W1 / GLASS	W1	VARIES
108	Living	F1	B1	P1	C1	10'-0"
109	Dining	F1	B1	P1	C1	10'-0"
110	Kitchen	F2	B1	P1 / T1	C1	10'-0"
111	Scullery / Pantry	F2	B1	P1 / T1	C1	10'-0"
112	Mudroom	F2	B2	P1	C1	9'-0"
113	Garage	F4	-	P3	C3	10'-0"
114	Covered Loggia	F5	-	-	C2	VARIES
201	Glass Bridge	F2	B1	P2	C1	TRIPLE HT.
202	Family Lounge	F1	B1	P1	C1	10'-0"
203	Study	F1	B1	P1	C1	10'-0"
204	Laundry	F2	B2	P1	C1	9'-0"
205	Hall	F1	B1	P1	C1	10'-0"
206	Bedroom 2	F1	B1	P1	C1	10'-0"
207	Bedroom 3	F1	B1	P1	C1	10'-0"
208	Bedroom 4	F1	B1	P1	C1	10'-0"
209	Bedroom 5	F1	B1	P1	C1	10'-0"
210	Bath 2	F3	B2	T1 / P1	C1	9'-0"
211	Bath 3	F3	B2	T1 / P1	C1	9'-0"
212	Bath 4	F3	B2	T1 / P1	C1	9'-0"
213	Bath 5	F3	B2	T1 / P1	C1	9'-0"
214	Linen	F1	B1	P1 / W1	C1	9'-0"
215	Front Balcony	F5	-	-	C2	VARIES
216	Rear Terrace	F5	-	-	C2	VARIES
217	Green Roof	F6	-	-	-	-
301	Landing	F2	B1	P2	C1	TRIPLE HT.
302	Bedroom 6	F1	B1	P1	C1	10'-0"
303	Bath 6	F3	B2	T1 / P1	C1	9'-0"
304	Bedroom 7	F1	B1	P1	C1	10'-0"
305	Bath 7	F3	B2	T1 / P1	C1	9'-0"
306	Hall	F1	B1	P1	C1	10'-0"
307	Mech.	F4	-	P3	C1	9'-0"
308	Primary Bedroom	F1	B1	P1	C1	10'-0"
309	Dressing Room	F1	B1	P1 / W1	C1	9'-0"
310	Spa Bath	F3	B2	T1 / P1	C1	9'-0"
311	Front Terraces	F5	-	-	C2	VARIES
312	Primary Terrace	F5	-	-	C2	VARIES

VILLA GOOCH

THE LANTERN HOUSE

2316 GOOCH STREET
DALLAS, TEXAS 75241
ALAMEDA HEIGHTS · DALLAS COUNTY

OWNER

ARCHITECT OF RECORD

STRUCTURAL ENGINEER

MEP ENGINEER

SCHEMATIC DESIGN
NOT FOR CONSTRUCTION
Developed from listing photos and walkthrough video. Verify survey, zoning, geotechnical report and all dimensions before design development.

REVISIONS

NO.	DATE	DESCRIPTION
0	10.21.2026	SCHEMATIC DESIGN ISSUE

PROJECT NO.
2316-GS

ISSUE DATE
10.21.2026

SCALE
NTS

DRAWING SET
ARCH D · 36" x 24"

SHEET TITLE
SCHEDULES & AREAS

SHEET
A5.1